C-TYPE
FIX STROKE PRESS

High current | Super large motor | Strong pressure | Multiple models

ABL-63
bakingpak
ABL-63

45T/55T/63T

PRODUCT PARAMETERS

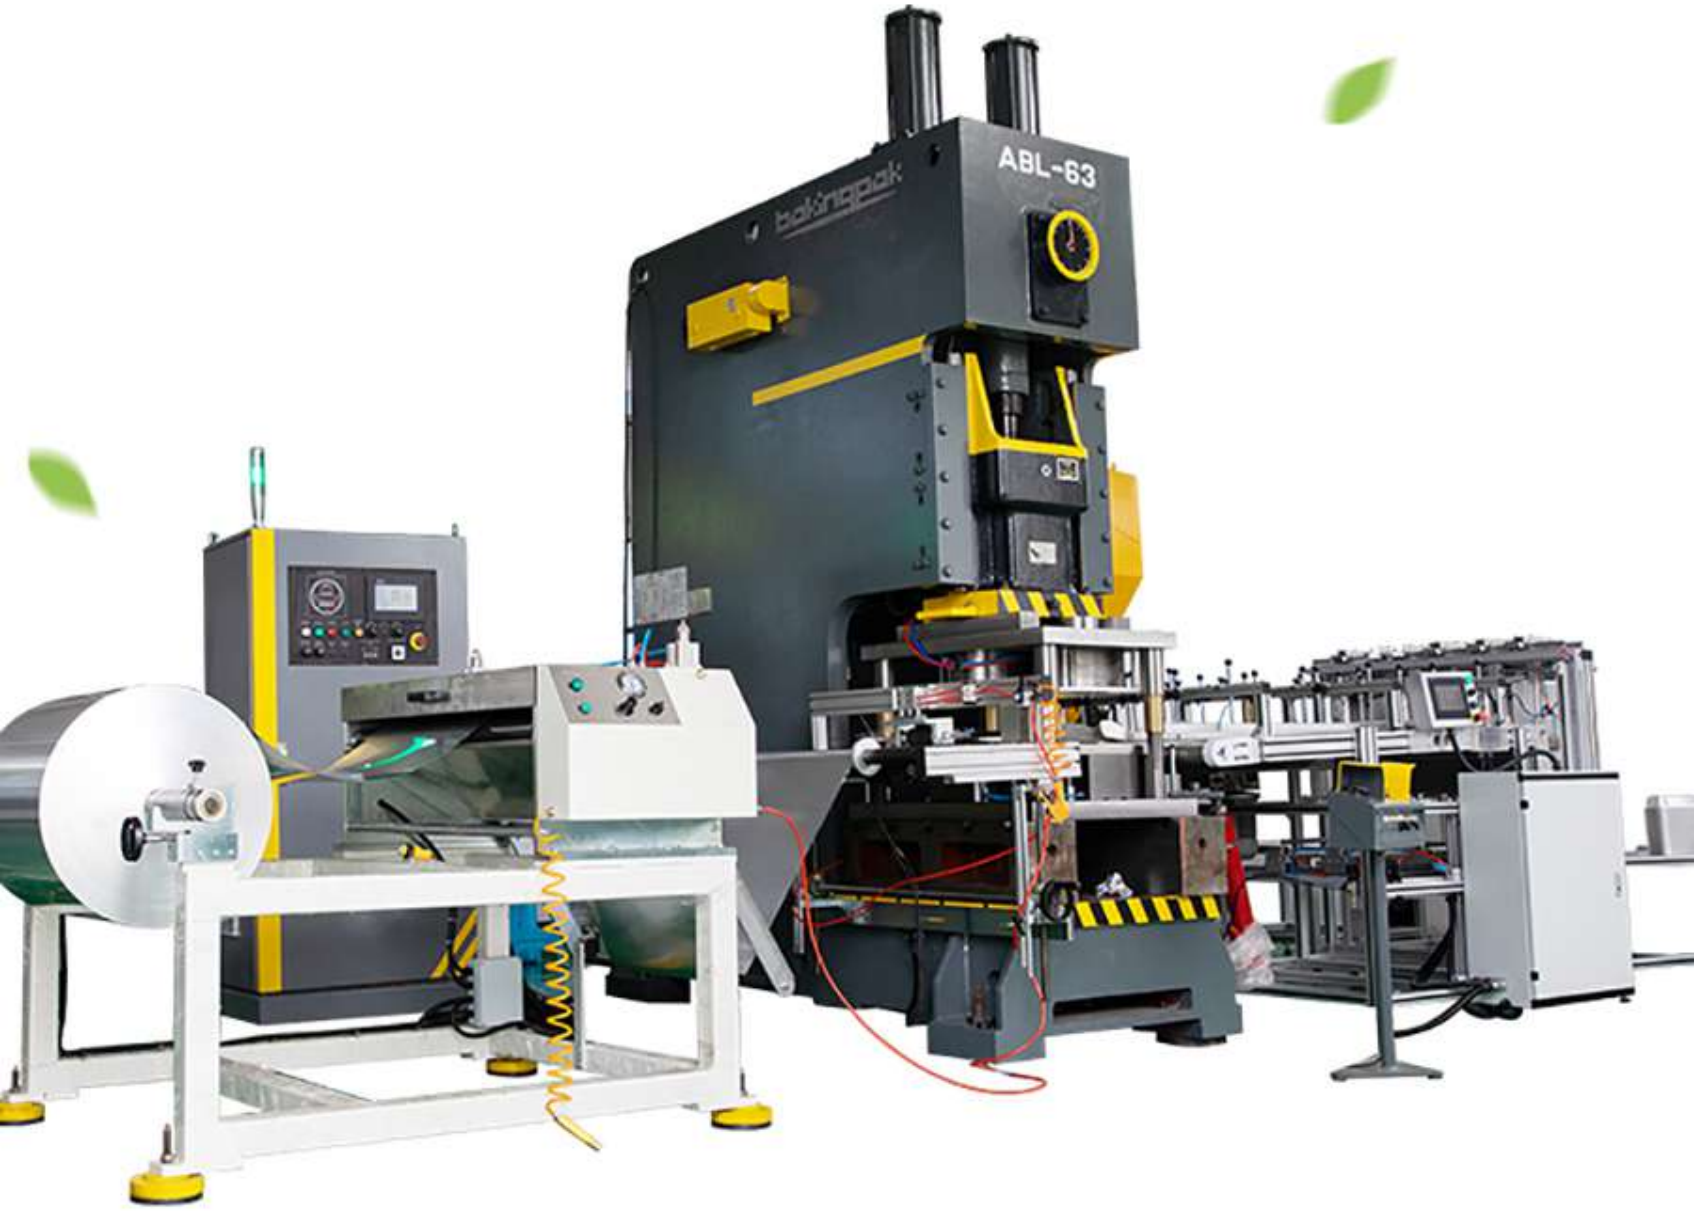

TECHNICAL PARAMETER

Name	ABL-45/ABL-55/ABL-63
Nominal Force	450/550/630KN

Nominal Force distance	4
Slide Block Stroke(optional)	180/220/240mm(optional)
Stroke Time	35-70time/min
Max. Die Height	380/400/400mm
RAM Adjustment Height	80mm
Magnetic Valve	6 Group SMC Magnetic Value
Work Block Dimension	900*200*230
(front&back*left&right * thickness) (increase cope hole)	Moving platen
Work Plate Dimension (front&back*left&right)	225x400/225x400/360x480mm
Install Hole Diamension of Work Plate	145x360/145x360/320x380mm
Shank Hole Size (diamension*deepth)	Φ60*deep 80
Stand column distance	630mm
Air Pressure	0.6/Mpa
Gasholder	4
Shock Pad	4
Voltge & Frequency (Optional)	415V/380V-50HZ-3PHASE
Total Power	9.7/9.7/13KW
Total Diamension	7000X2800X3600MM
Machine Weight (N.G.)	6500KG/6500KG/7000KG

PUNCHING MACHINE

SUITABLE FOR SMALL MOLD

The Press which offers a large tool area is optimized for fast mould change and easy setup.The shut height is adjustable according to the mould requirement.The Press has 12PLC controlled solenoid valves with independent pressure regulators for optimal tool setup and adjustment.The Press is also equipped with 6additional pressure tanks for optimal air distribution.

The operator of the machine only has to set up the packaging requirement(pcs to cout)at the touch screen and collect the finished counted and stacked products on the end of the line.

ABL-63
bakingpak

Note: multiple devices can be connected,
and the body color can be customized.

Mechanical advantage

1. Welded body with steel plate and high intensity.
2. Main motor is made by Siemens.
3. Adopts combined pneumatic friction clutch and brake.
4. Cluster gear adopts the flooding oil lubrication.
5. Six-face rectangle lenthen guide.
6. Equipped with hydraulic overload protecting device.
7. Equipped with lifting balance cylinder.

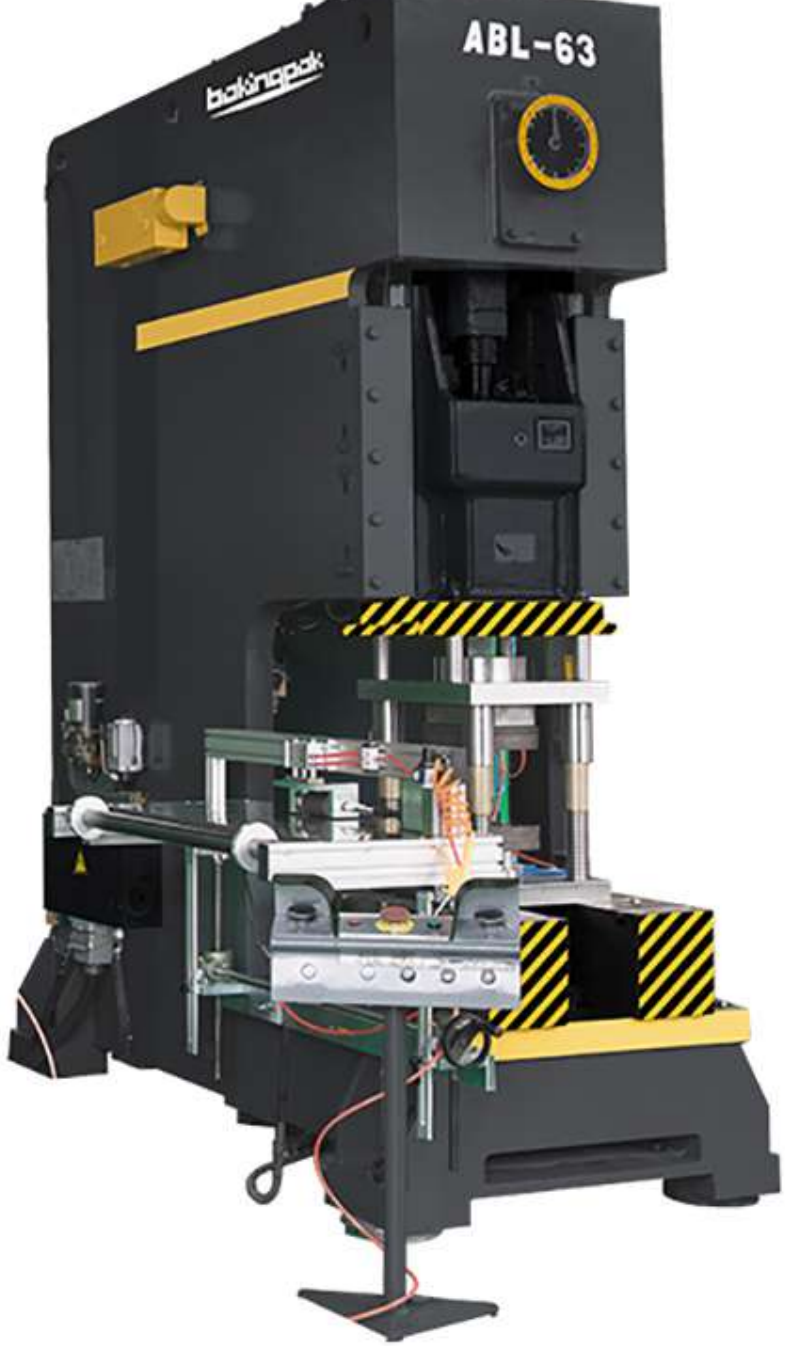

SCHEMATIC DIAGRAM OF PRODUCTION LINE LOCATION：

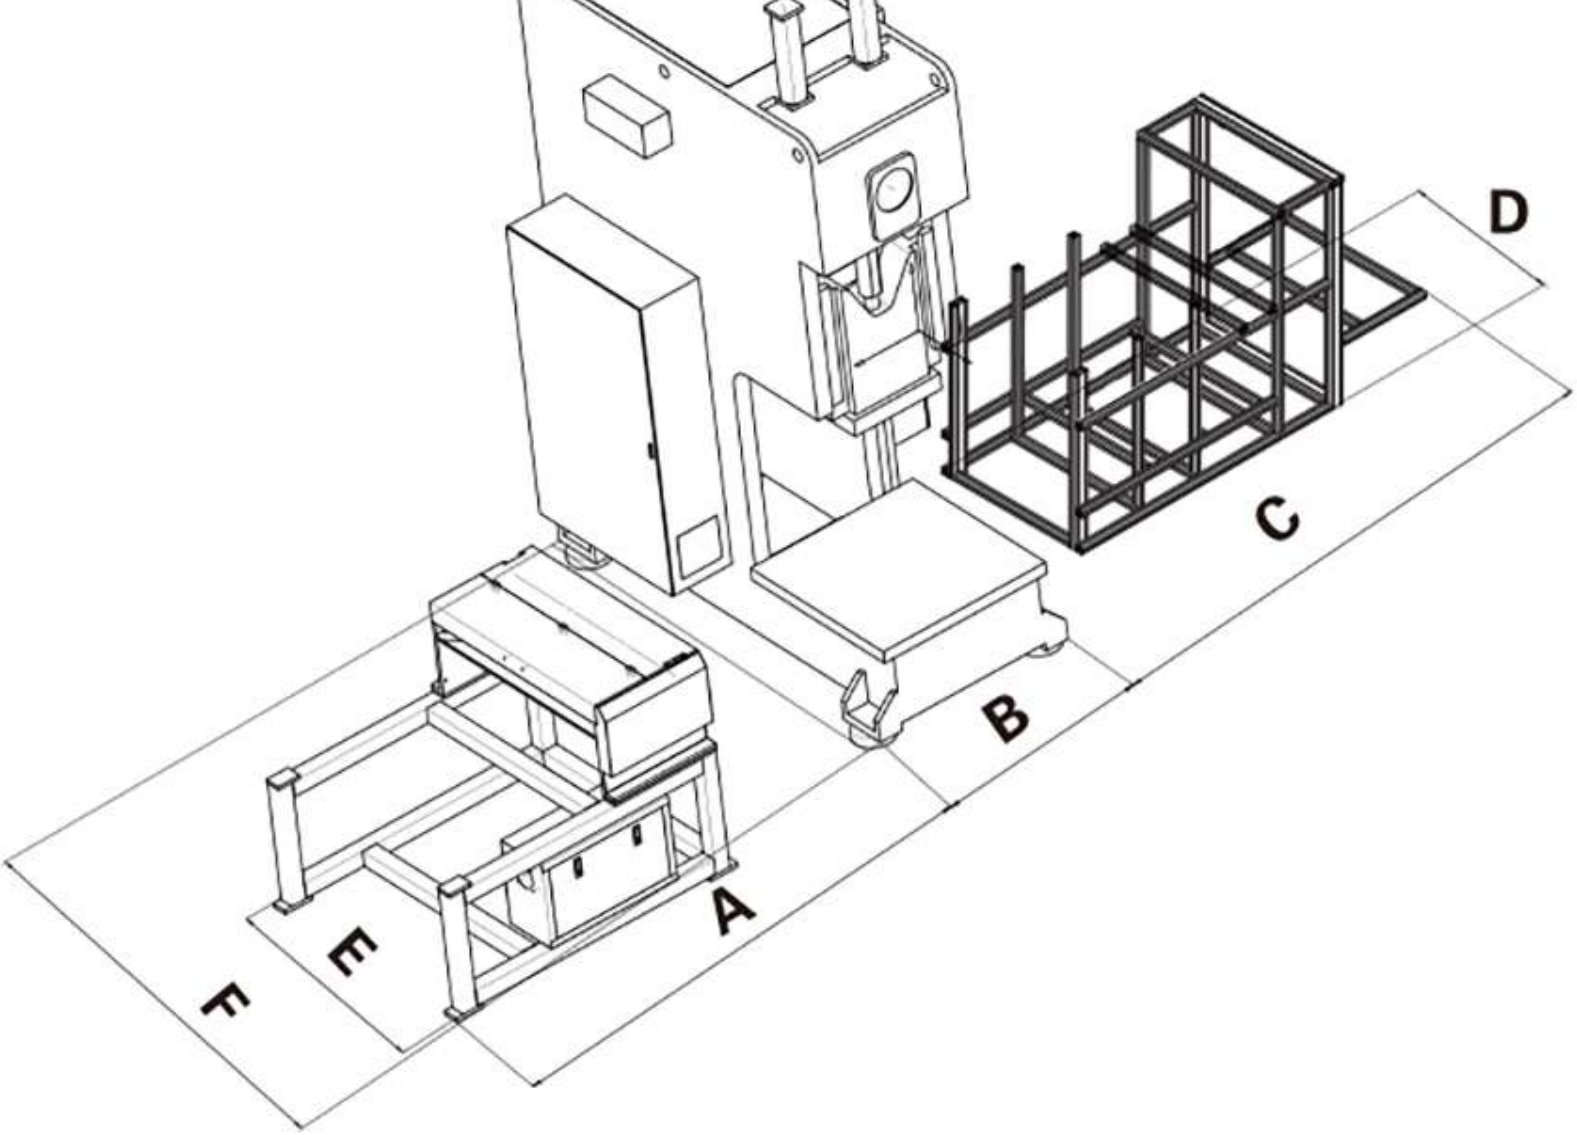

SIZE OF POSITIONS OCCUPIED BY EACH COMPONENT

unit: mm

Model	ABL-45	ABL-63	ABL-80
A	2850	2850	3400
B	1300	1300	1500
C	3150	3150	3150
D	1600	1600	2150
E	1500	1500	1900
F	2100	2200	2150

PICTURE DISPLAY

FINE DRUG EFFECT OF ATOMIZATION PARTICLESFINE DRUG EFFECT OF ATOMIPARTICLESFINE DRUG
FINE DRUG EFFECT OF ATOMIZATION PARTICLESFINE DRUG EFFECT OF ATOMIZATION PARPARTICLESFINE DRUG EFFECT OF ATOMITICLESFINE DRUG EF

POSITIVE DISPLAY
bakingpak
ABL-63
ABL-63

BACK DISPLAY

SIDE DISPLAY

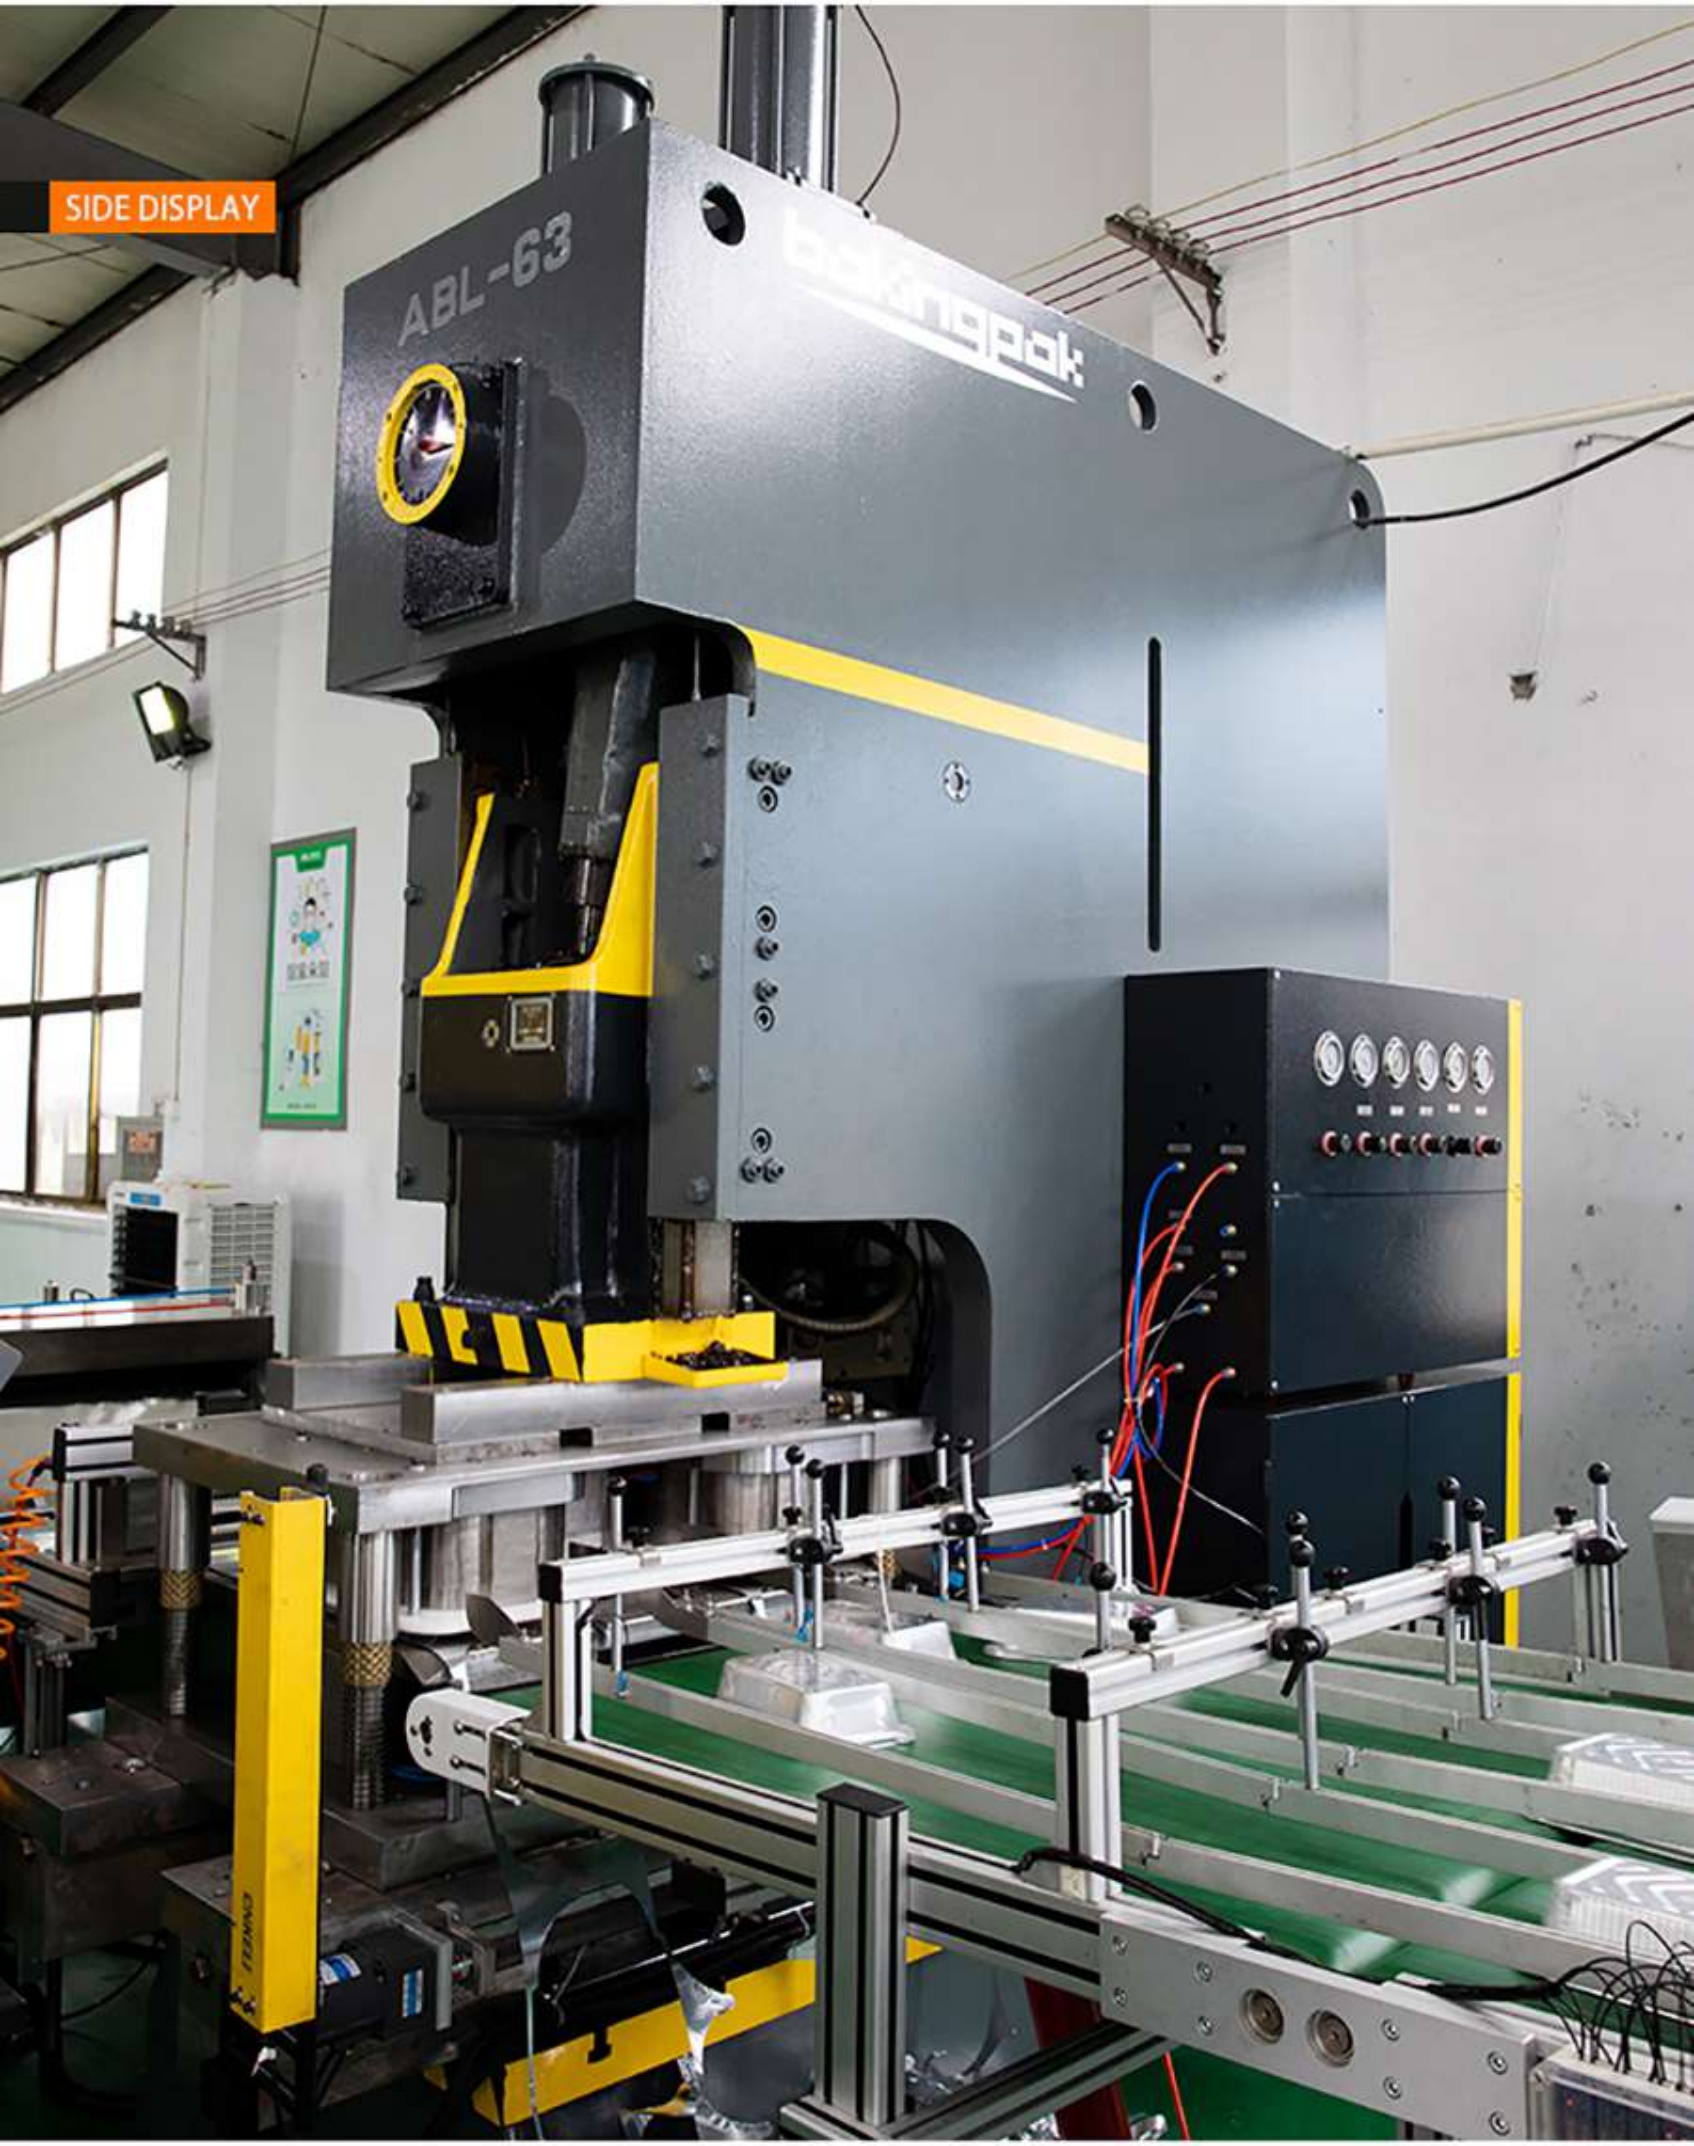

ACCESSORIES DISPLAY

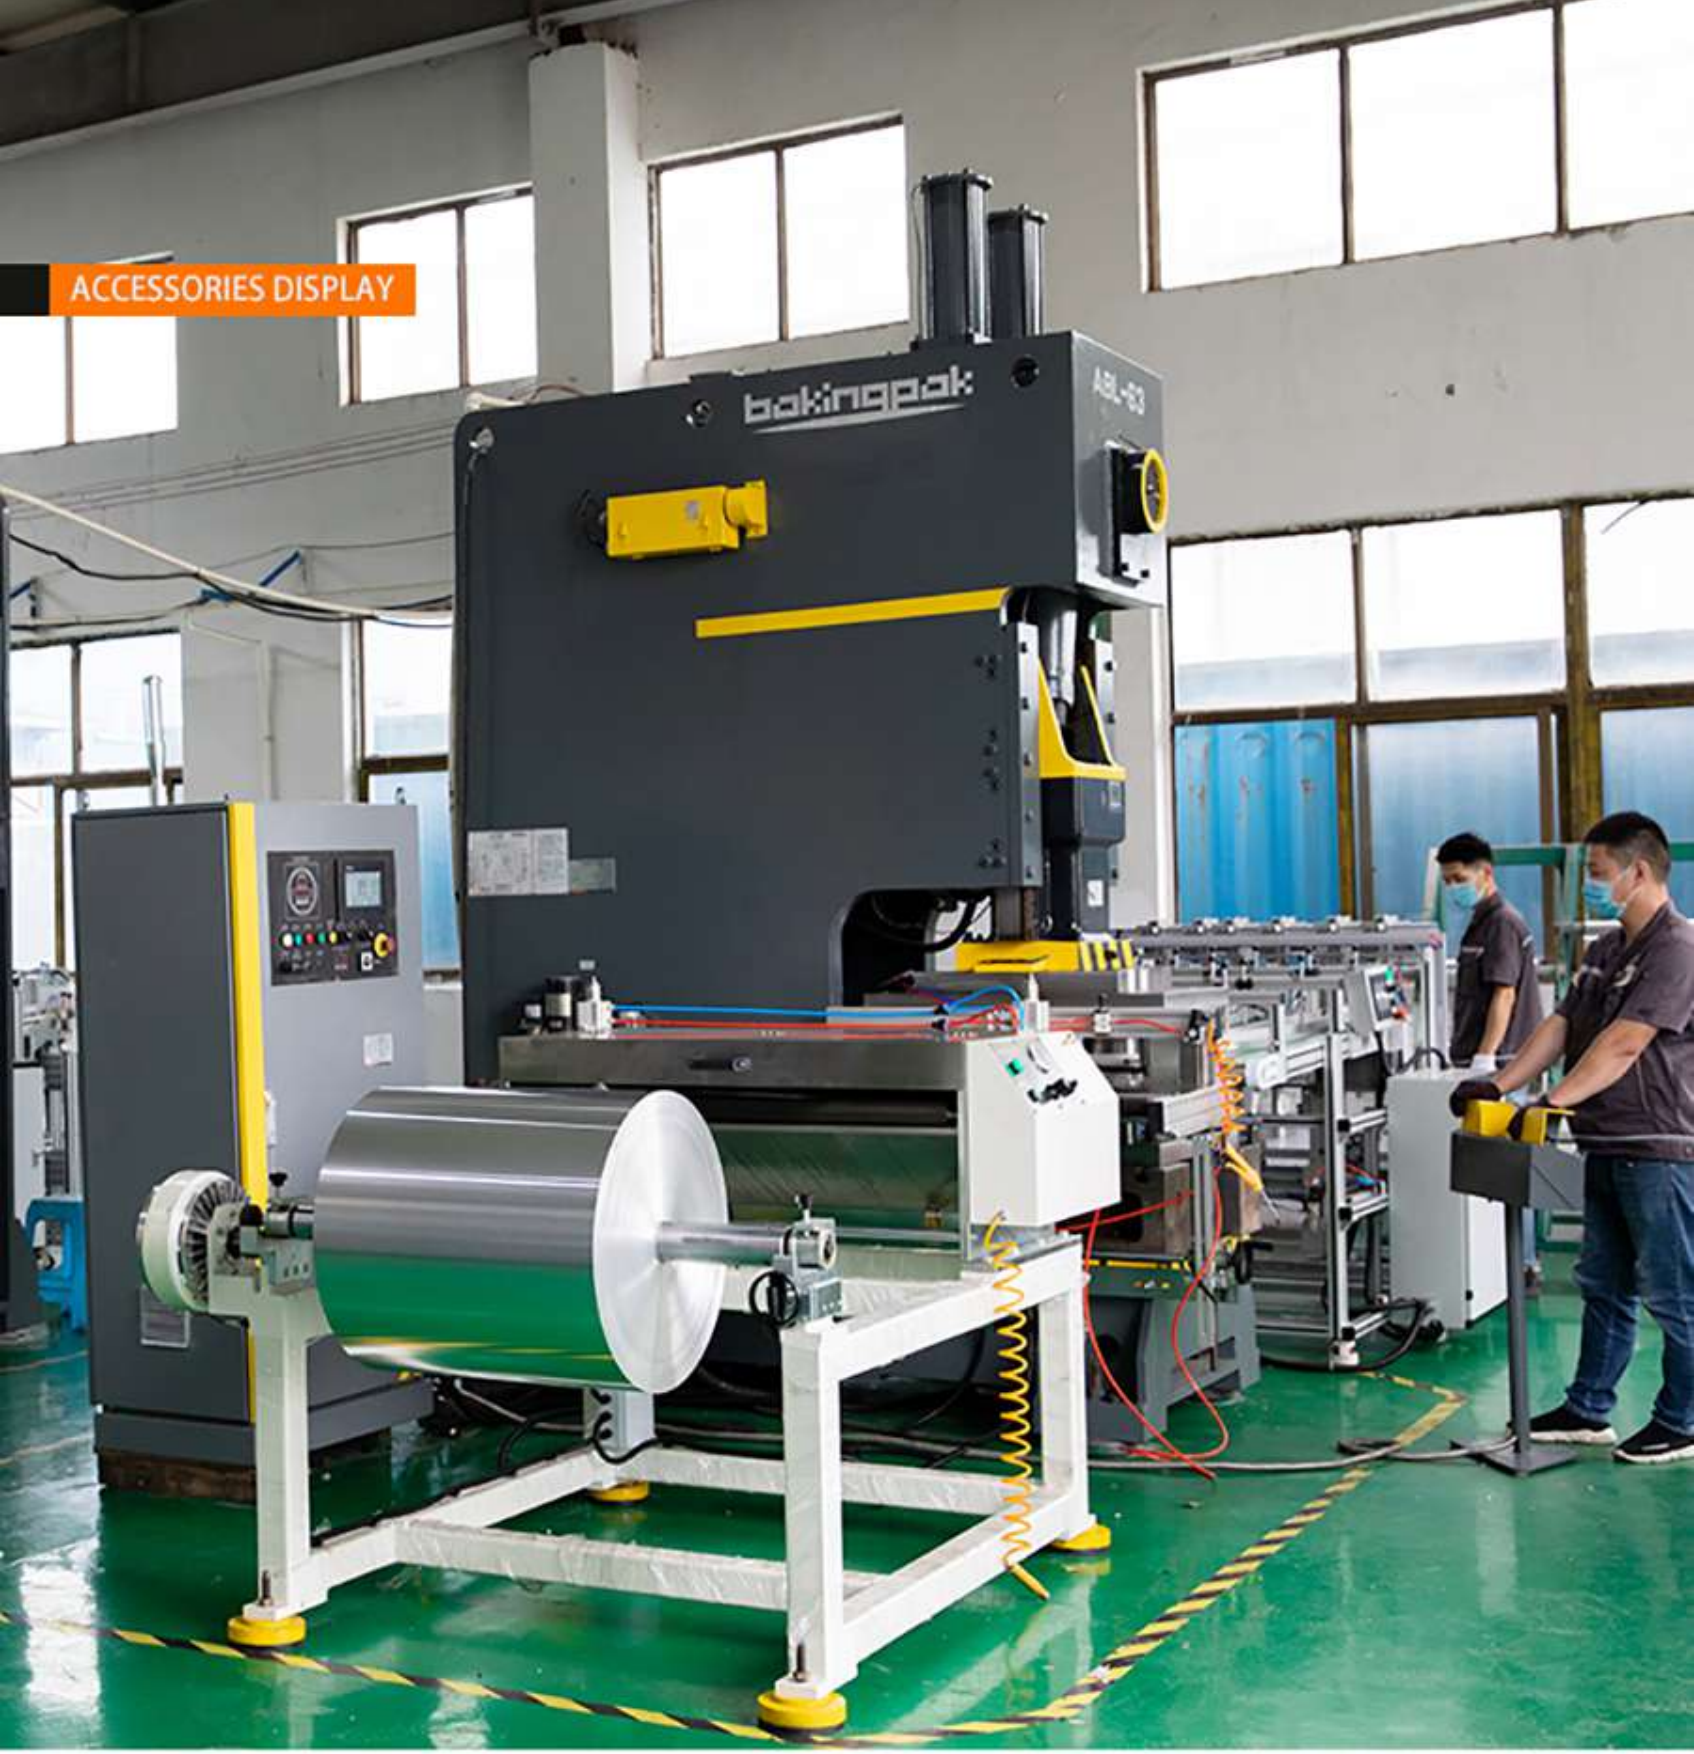

Overall display

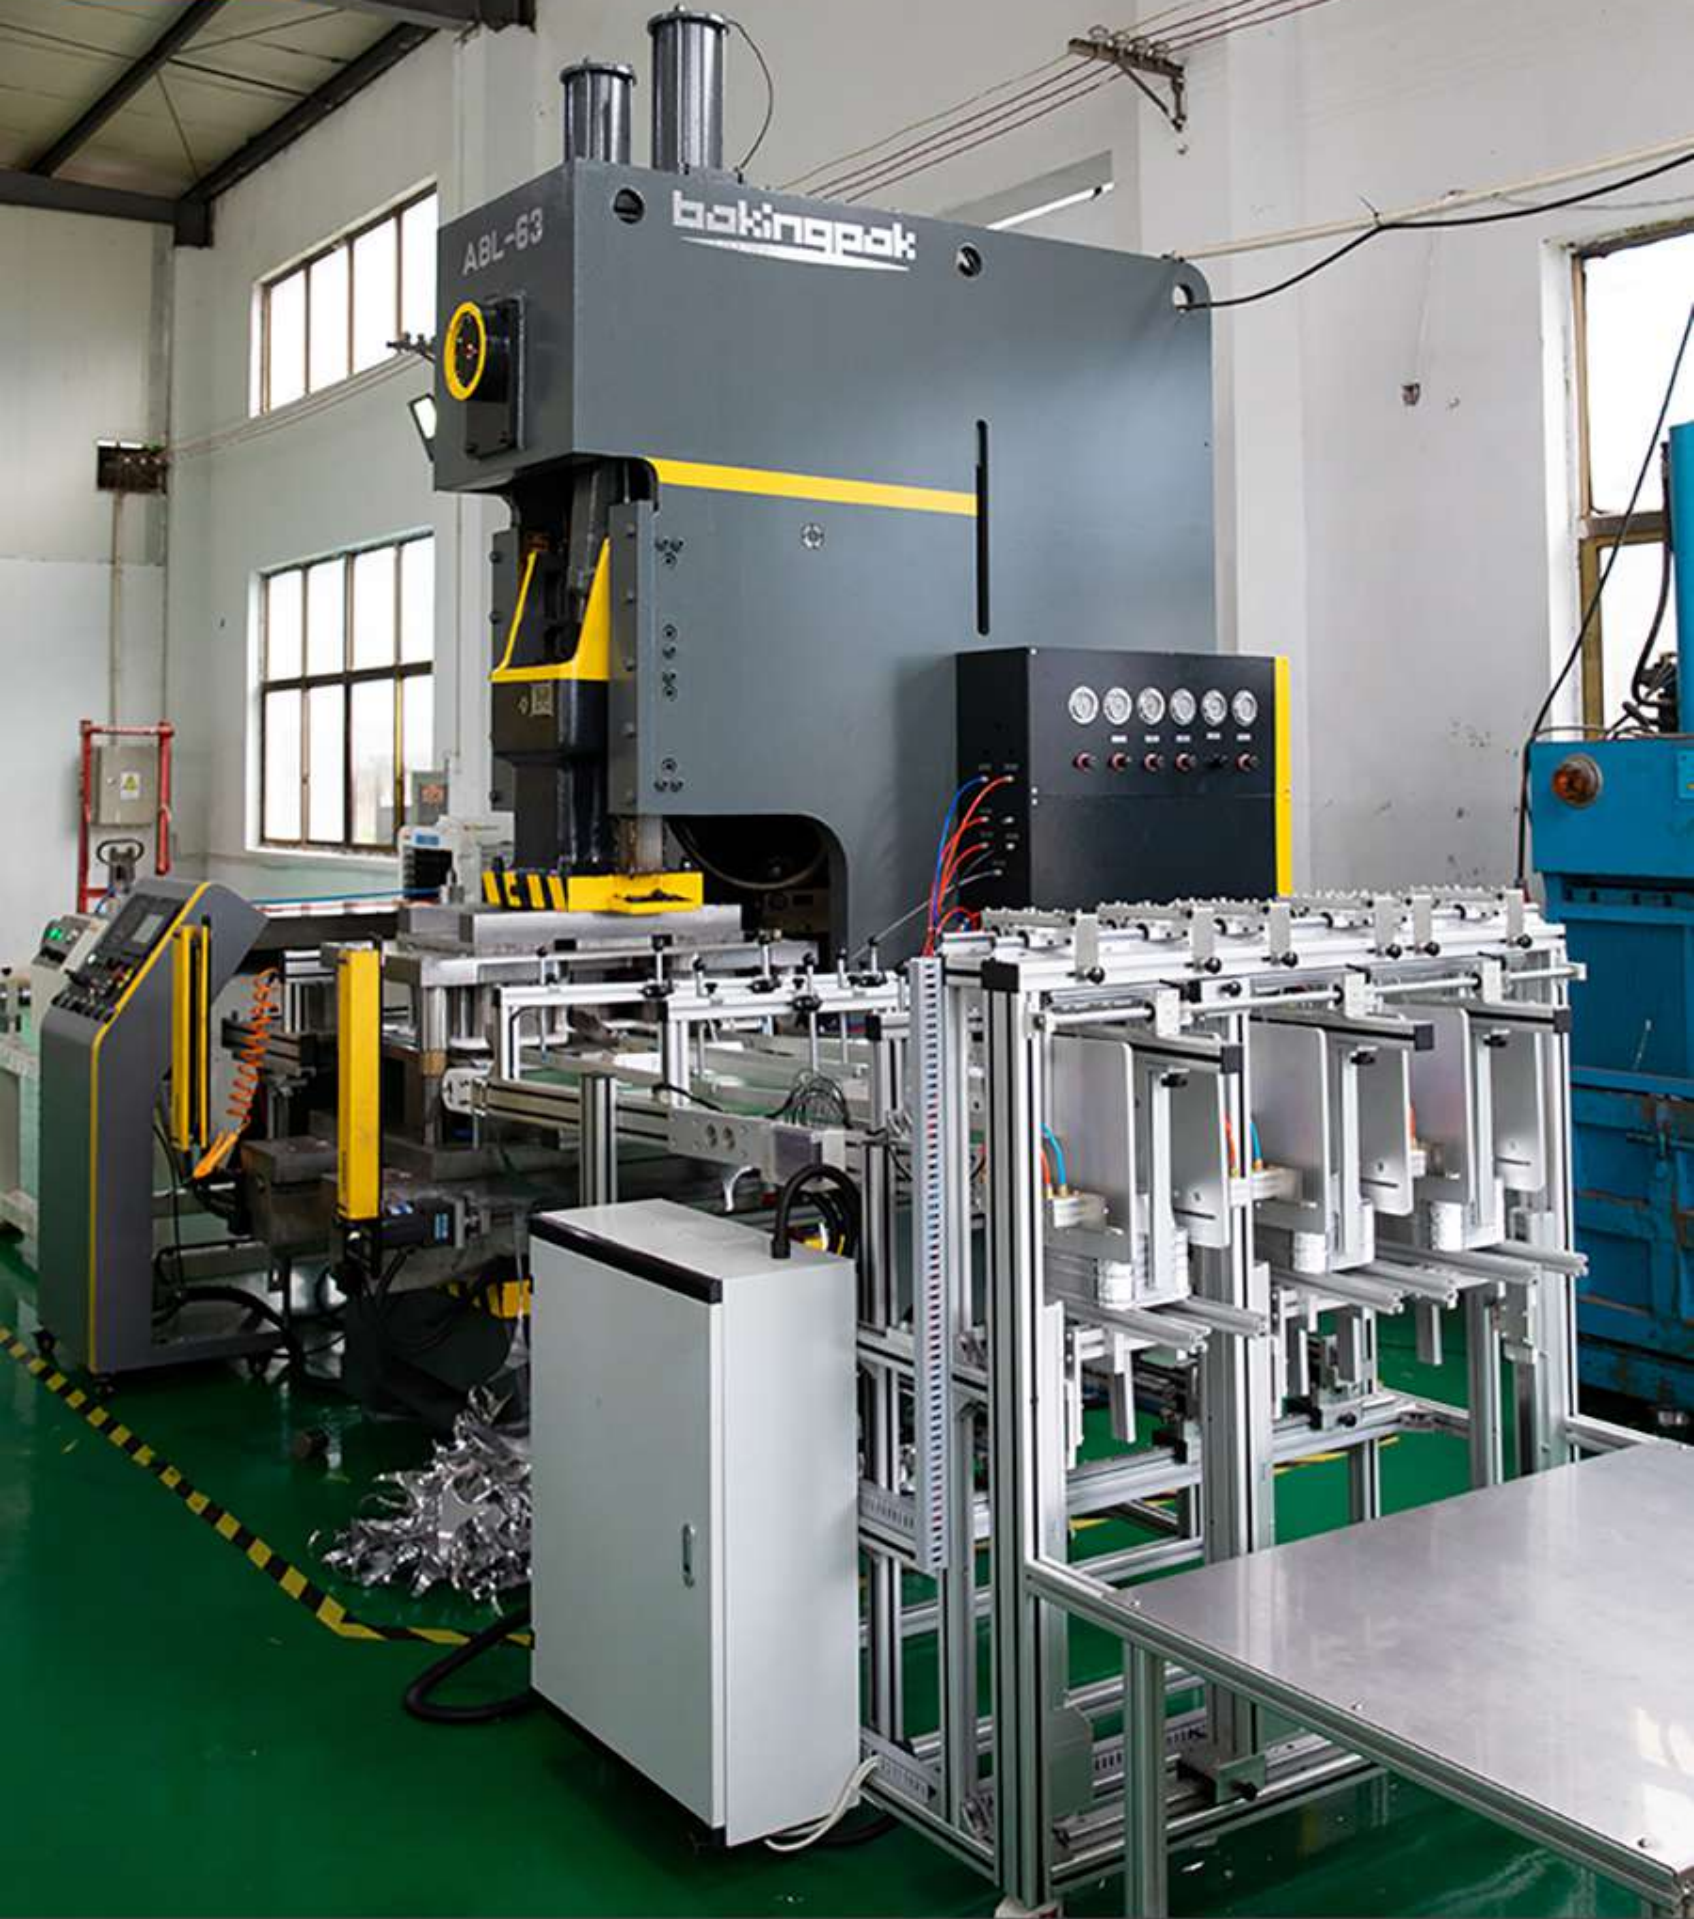

COMPANY STRENGTH

Our company can meet all kinds of bidding export requirements and a complete range of certificate.

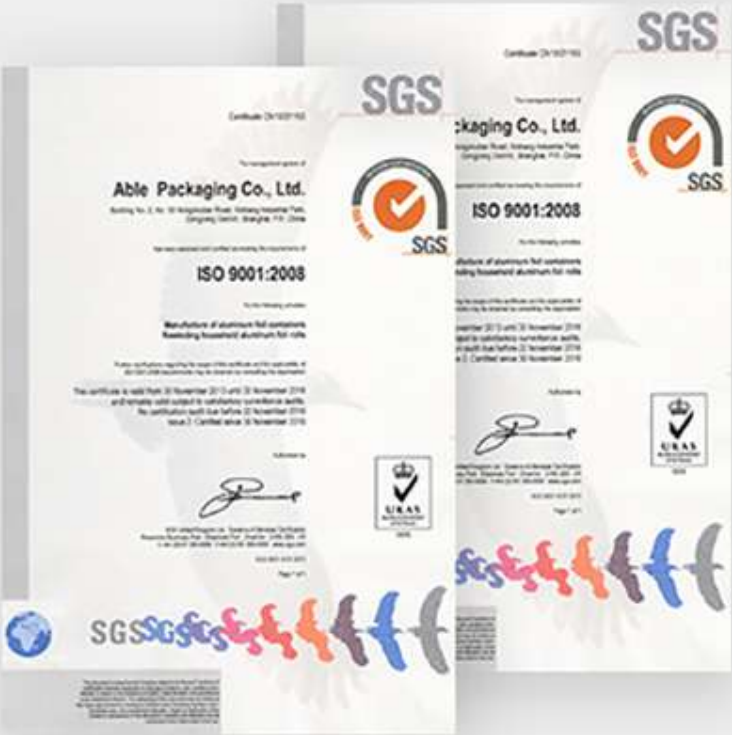

SGS

Able Packaging Co., Ltd.

ISO 9001:2008

Manufacture of aluminum foil containers
Rewinding household aluminum foil rolls

检 测 报 告

检 测 报 告

Test Report

产品名称：
Name of Sample

规格型号：
Type

委托单位：
Applicant

检测类别：
Test Purpose

上海市质量监督检验技术研究院
Shanghai Institute of Quality Inspection and Technical Research

Registered capital:
20 million yuan

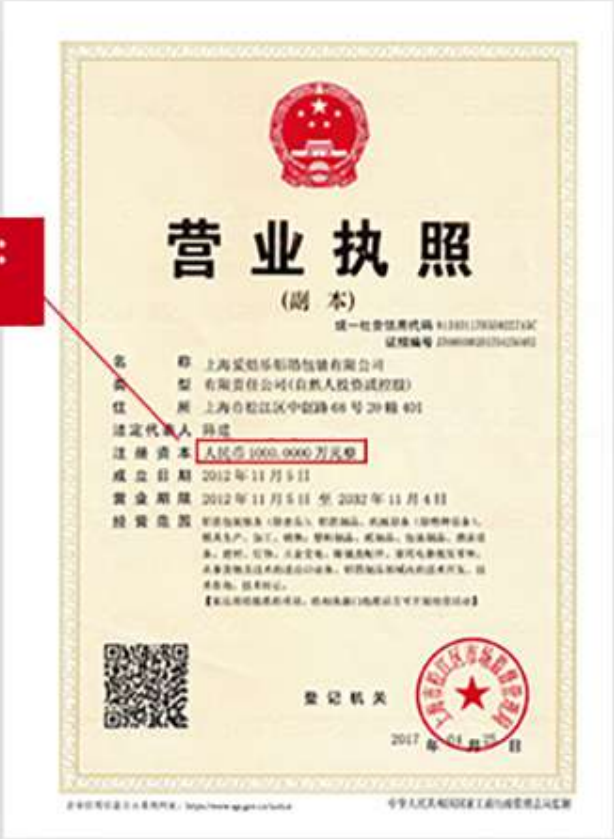

营 业 执 照

（副 本）

类 型 有限责任公司（自然人投资或控股）

注 册 资 本 人民币1000.0000万元整

成 立 日 期 2012年11月5日

营 业 期 限 2012年11月5日 至 2032年11月4日

登记机关

2017年04月28日

We have long experience to work with Aluminum container

mould for our own produciton, and customers’ requirements to manufacture. Our high technology moulds are easy to operate and maintain.
All of our tools are made by high quality steel. Flow areas heat treated for proper hardness. Our molds ensure reliable tools with long life.

WE DON'T JUST MAKE PRODUCTS...

SERVICE VOLUME, SERVICE AND COMMITMENT

As the standard of European mold, meets the sanitary rule of food-grade no-wash container production, solid structure (1100kg mold), the mold steel adopted is more wear-resistant, higher processing accuracy, 1-year after-sales warranty.

NO WORRIES AFTER SALES

We reserve the right to upgrade the production line and molds, but we promise that the purpose of technical upgrading and configuration modification is to improve the performance of equipment and molds.
Thank you again for your support.

Return or change of goods without reasons	One year warranty	All-day after-sales service

On site debugging

+

Guided of maintenance

+

Service for repair